





NSF



NSF

*NSF

NSF

NSF

-
-
-
-
-





NSF

IP69K

80

100

CRI 80



HIGH CRI = 80



LOW CRI >50

HB 21

NSF



- IP69K
-
-
-
-
- L70 >100 000

SPECIFICATIONS

	150 /
CCT	3000 , 4000 , 5000
CRI	Ra70 (Ra80)
	90°, 120° (Standard)
	100-277Vac (Standard)
IP	IP69K
L70	>100,000 Hours
LED Driver	MeanWell
Operating Temp.	-30°C ~ +50°C
	5
Certifcations	NSF CE, RoHS



100W	120W	150W	200W	240W
15000lm	18000lm	22500lm	30000lm	36000lm

HB 39

NSF



- IP69K
-
-
-
-
- L70 >100 000

SPECIFICATIONS

	140 /
CCT	3000 , 4000 , 5000
CRI	Ra70 (Ra80)
	60°, 90°, 120° (Standard)
	100-277Vac (Standard)
IP	IP69K
L70	>100,000 Hours
LED Driver	Sosen
Operating Temp.	-30°C ~ +45°C
	5
Certifications	NSF CE, RoHS



100W	120W	150W
14000lm	16800lm	21000lm

/

LHB 19

- IP69K
- NSF
- IP69K

•

•

•

•

•

• L70

•

6kV/10kV

>100 000

PMMA




SPECIFICATIONS

	135 /
CCT	3000 , 4000 , 5000
CRI	Ra80
	40*100,°60*90,°90*100,°
	100-277Vac (Standard)
IP	IP69K
L70	>100,000 Hours
LED Driver	Inventronic
Operating Temp.	-30°C ~ +50°C
	5
Certifications	NSF CE, RoHS



70W	120W
9450lm	16200lm

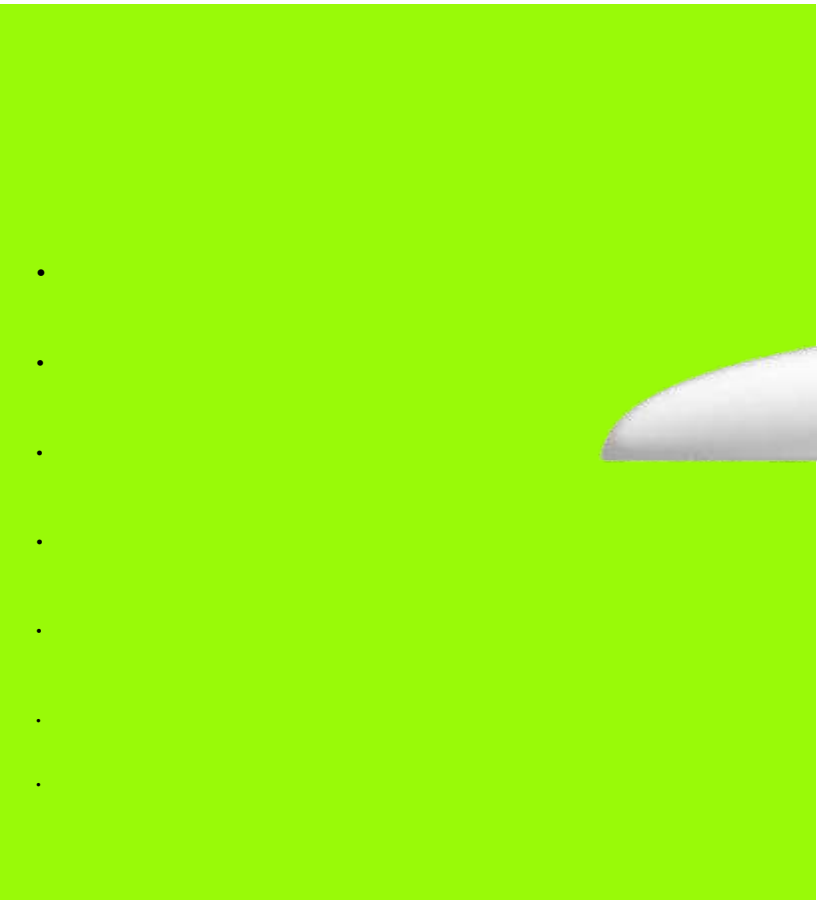

. 050 336 52 62

. 050 358 92 00